

1) Publication number:

0 655 862 A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 94118408.7

(2) Date of filing: 23.11.94

(a) Int. Cl.⁶: **H04N** 5/44, H04N 11/00, H04N 5/21

(30) Priority: 26.11.93 JP 296747/93

② Date of publication of application: 31.05.95 Bulletin 95/22

Designated Contracting States:
DE FR GB NL

Date of deferred publication of the search report: 20.09.95 Bulletin 95/38

Applicant: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. 1006, Oaza Kadoma Kadoma-shi, Osaka-fu, 571 (JP)

Inventor: Hayashi, Kenichiro

4-10-207, Ikuno Katano-shi, Osaka (JP)

Inventor: Kageyama, Sadashi 5-29-C-302, Akashia-dai

Sanda-shi, Hyogo-ken (JP) Inventor: Handa, Kouji

Yodogawa-ryo, 1-4-40, Nonaka-minami,

Yodogawa-ku

Osaka-shi, Osaka (JP)

Inventor: Uwabata, Hideyo 5-5-C27-307, Korigaoka

Hirakata-shi, Osaka (JP)

Inventor: Kisoda, Akira 3-4-3, Kaji-machi Moriguchi-shi, Osaka (JP)

Inventor: Hayashi, Takaya

1-13-4, Nozoe Nagaokakyo-shi, Kyoto (JP)

Inventor: Ogata, Yasuyo 2-12-35, Mishimaoka

Ibaraki-shi, Osaka (JP)

Inventor: Yasumoto, Yoshio

2-2-1, Syoyo-dai Nara-shi, Nara-ken (JP)

Representative: Kügele, Bernhard et al NOVAPAT-CABINET CHEREAU, 9, Rue du Valais CH-1202 Genève (CH)

(54) Signal processing apparatus and method for wide-screen television system.


(57) The television signal processing apparatus receives a video signal including a main signal (y,c) and a helper signal (VT,VH,AH), and produces a signal for display based on the main signal and the helper signal, the main signal being arranged in a predetermined portion of the screen having a first aspect ratio and representing a picture having a second aspect ratio, and the helper signal being used for improving the quality of picture of the main signal. The television signal processing apparatus includes: a noise/ghost detection circuit for detecting the level of at least one of noise and ghost included

in the video signal, and for producing at least one control signal (ki) based on the detected level; a first signal processing circuit for receiving the main signal and for producing a first reproduction signal by processing the main signal; a second signal processing circuit for receiving the main signal and the helper signal, and for producing a second reproduction signal by processing the main signal and the helper signal; a mixing circuit (113) for receiving the control signal and the first and second reproduction signals, and for adding the first and second reproduction signal with respective weights in accor-

EP 0 655 862 A3

dance with the control signal; and a circuit for converting an output signal of the mixing circuit into the signal for display. If the video signal includes noise

and/or ghost, the image quality is prevented from being degraded due to the addition of the helper signal.

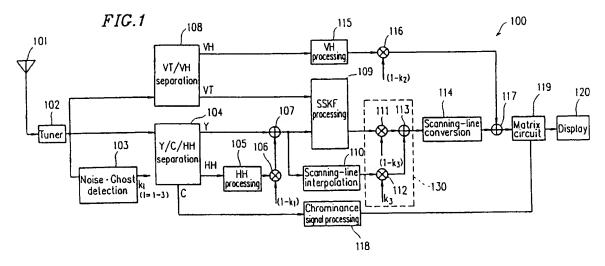

EUROPEAN SEARCH REPORT

Application Number EP 94 11 8408

Category	Citation of document with inc of relevant pass		Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	GB-A-2 264 418 (GEN 1993 * page 1, line 1 - p * page 9, line 15 - claims 1,2; figures		H04N5/44 H04N11/00 H04N5/21	
A	US-A-5 067 018 (SAKA November 1991		11	
A	TECHNOLOGY) 9 August		1,2,5,6 8,10,11 14,15,1	
	* page 19, line 10 - figure 4 * * abstract *	- page 20, line 20;		
D,A	ITE TECHNICAL REPORT vol. 17, no. 65, Oct pages 19-24, KAZUO ISHIKURA ET AL Hardware of Letterbo multiplexed LD/VH he * the whole document	cober 1993 L. 'Experimental EXECUTE STATES	1,3,5-8 10,12, 14-17	TECHNICAL FIELDS SEARCHED (Int.Cl.6) HO4N
	The present search report has be	een drawn up for all claims		
	Place of search	Date of completion of the search		Farminer
	THE HAGUE	18 July 1995	Fu	ichs, P
Y:pa do A:te	CATEGORY OF CITED DOCUMENticularly relevant if taken alone relicularly relevant if combined with anocument of the same category chnological background physwitten disclosure	E : earlier paten after the fill ther D : document cit	ted in the application of the second	blished on, or on ss

				- •1	
		•	1.		
				, -	
				3	
•					
			*,		